

tyco

Fire Protection Products

INERGEN

Gaseous Fire Suppression Systems
with i-Flow technology

HYGOOD

Inergen
clean Agent Systems

with **iFlow** technology

INERGEN

Gaseous fire suppression systems

The production of Halon 1301 was banned for non critical applications due to its negative effects on the ozone layer. We engineered INERGEN to be environmentally kind from the very start.



Environment

INERGEN is non-synthetic, made exclusively of gases we already breathe: nitrogen, argon and carbon dioxide. Once discharged, it simply returns to the atmosphere in its natural state and because it poses no threat to the ozone layer or climate change, INERGEN will never be subject to future legislative restrictions.

Efficient and Safe

Environmentally friendly and safe for people, INERGEN is effective in

suppressing fires involving virtually all combustible materials and flammable liquids.

INERGEN works by displacing a proportion of the air within the enclosure, thereby lowering the oxygen to a level that cannot sustain combustion and at the same time ensures the oxygen remains at levels within the enclosure that are safe for humans.

- // **Exceptional life safety features**
- // **Environmentally friendly**
- // **Remote cylinder storage location**
- // **Multiple hazard protection**
- // **Low cost agent**

INERGEN

Gaseous fire suppression systems with i-Flow technology



A Comprehensive Design Service

FIRENET is a windows based design package used by trained engineers as a means to accurately calculate system parameters.

The software calculates optimum pipe sizes as well as calculating the over pressure vent requirements for the given system.

Designed to Approved Standards

Systems are designed in accordance with EN15004, ISO 14520 or NFPA 2001 using the HYGGOOD i-Flow design calculation software. INERGEN gas is stored in 80 litre and 140 litre 200/300 bar cylinders designed to meet the requirements of the TPED (Transportable Pressure Equipment Directive).

Applications

- // *Telecommunications sites*
- // *Data centres*
- // *Museums and archives*
- // *Oil and gas facilities*
- // *Power generation installations*
- // *Civil and military marine*
- // *Mass transit*

Approvals and Listings

VdS
ULC
USCG



Safety First

INERGEN is a blend of Nitrogen, Argon and CO₂. It is recognised that the CO₂ in INERGEN provides a specific safety advantage compared to other inert gases. The UK's Halon Alternatives Group specifically assessed safe use criteria of clean agents and identifies INERGEN, due to the CO₂ as having benefits compared to other inert gases in respect to egress times from protected enclosures. Not only is INERGEN safe for the environment but has this extra life safety feature for people too.

Better for People

One of the most remarkable aspects of INERGEN is that it is safe for people. INERGEN is entirely non-toxic, producing no corrosive decomposition products whatsoever. Plus, because INERGEN will not produce a fog when discharged, escape routes remain visible.


With INERGEN, the oxygen level is reduced enough to put out the fire, yet more than enough remains to breathe. In fact, those who breathe normally around INERGEN in extinguishing concentrations receive the same amount of oxygen to the brain as they would in an ordinary atmosphere, vital in cases where immediate evacuation may not be possible.



What is i-Flow Technology

The i-Flow technology has been designed to eliminate the peak pressure spike during discharge and delivers a lower pressure into the pipework system. The specially designed valve evens out the gas flow into the protected enclosure, lowering the over pressurisation effect and reducing the venting required.

The graph below compares the pressure curves for a standard discharge system and i-Flow technology. The standard system displays a distinctive pressure 'spike' on discharge, normal for regular inert gas systems. Whilst these systems meet the requirements of EN15004, ISO 14520 and NFPA 2001 our engineers recognised that a more even discharge could offer real benefits for installers and users alike, which is illustrated by the second curve on the graph.

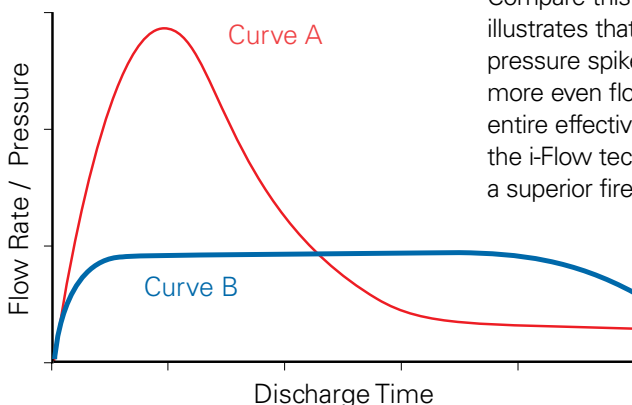

Pipework Safety

The i-Flow valve is designed to close in the event of a blockage in the pipework, thus avoiding a hazardous build up of pressure - an important safety feature.



i-Flow technology explained

Curve A shows a standard high pressure inert gas system discharge, with its distinctive peak flow and pressure spike which requires larger and higher specification pipework and a greater venting area.

Compare this with Curve B which illustrates that the peak flow and pressure spike has been eliminated and a more even flow achieved during the entire effective discharge period. This is the i-Flow technology, working to provide a superior fire suppression system.

Matrix System - Innovation

The i-Flow Matrix system includes features to minimise installation time. In a system of 8 cylinders or less, this is achieved by using a patented horizontal check valve to facilitate interconnection of cylinders without the need to connect each one to a manifold.

The i-Flow Matrix system also incorporates a distinctive bracket design allowing far more flexibility during installation and quicker removal of cylinders from the bank during maintenance, when compared with traditional racking systems.



A close-up photograph of a young child with dark hair, seen from the side, blowing a dandelion seed head. The child's face is partially visible, showing their nose and lips. The background is a bright, sunlit field with many dandelion seeds floating in the air, creating a soft, bokeh effect. The overall atmosphere is warm and natural.

**Trusted
gaseous
solutions
using
pioneering
technology**



Global strength. Local expertise. At your service.

Head Offices:

Austria (Vienna)

Tel: +43 (0)1 271 0049
Fax: +43 (0)1 271 0142

Belgium (Mechelen)

Tel: +32 (0)15 285 555
Fax: +32 (0)15 206 076

Czech (Liberec)

Tel: + 420 482 736 291
Fax: + 420 482 736 293

France (Paris)

Tel: +33 (0)1 48 178 727
Fax: +33 (0)1 48 178 720

Germany (Rodgau)

Tel: +49 (0)6 106 84455
Fax: +49 (0)6 106 18177

Hungary (Budapest)

Tel: +36 (0)1 481 1383
Fax: +36 (0)1 203 4427

Italy (Milan)

Tel: +39 (0)331 583 000
Fax: +39 (0)331 583 030

Singapore (Asia Pacific)

Tel: +65 (0)6577 4360
Fax: +65 (0)6481 8791

Spain (Madrid)

Tel: +34 (0)91 380 74 60
Fax: +34 (0)91 380 74 61

Sweden (Lammhult)

Tel: +46 (0)472 269 980
Fax: +46 (0)472 269 989

The Netherlands (Enschede)

Tel: +31 (0)53 428 4444
Fax: +31 (0)53 428 3377

Turkey (Ankara)

Tel: +90 (0)312 473 70 11
Fax: +90 (0)312 473 73 92

United Arab Emirates (Dubai)

Tel: +971 (0)4 883 8689
Fax: +971 (0)4 883 8674

United Kingdom (Manchester)

Tel: +44 (0)161 2594 000
Fax: +44 (0)161 8750 491